



Actinic BL Secura

Actinic BL 15W/10 Secura 1SL

Actinic BL TLD Secura – additional safety and HACCP approval
 The Philips Actinic BL TLD Secura is the shatter-proof version of the Actinic family. It has a special outer sleeve that keeps all glass and components together in the case of accidental breakage. This eliminates the risk of glass splinters showering down on food preparation areas for example. And that is why it meets strict HACCP requirements. As with all Actinic lamps the Secura version's performance is optimized to attract most insects and is therefore ideal for electronic fly killing systems. In addition, Philips provides a wide choice of BL TL, BL TLD, BL T5 and single-ended compact versions as well as a circular and a T5 version. Hence, product designers have a high degree of flexibility in choosing the best fitting solution for their needs – including compact designs. What's more, as a 100% lead-free and low-mercury product they also provide a good environmental choice.

Product data

• General Characteristics

Cap-Base	G13
Bulb	T8 [T8]
Main Application	Reprography
Useful Life	5000 hr
Life to 50% failures	8000 hr
EM	

• Electrical Characteristics

Lamp Wattage	15 W
Lamp Wattage Technical	15 W
Lamp Voltage	51 V
Lamp Current	0.335 A

• Environmental Characteristics

Mercury (Hg) Content	5.5 mg
----------------------	--------

• Light Technical Characteristics

Color Code	10
Color Designation (text)	Actinic
Chromaticity Coordinate X	222 -
Chromaticity Coordinate Y	210 -
Depreciation 5000 hours	40 %
Depreciation 2000 hours	25 %

• UV-related Characteristics

UV-A Radiation 100hr (IEC)	3.15 W
UV-B/UV-A (IEC)	0.2 %


• Product Dimensions

Base Face to Base Face A	437.4 (max) mm
Insertion Length B	442.1 (min), 444.5 (max) mm
Overall Length C	451.6 (max) mm
Diameter D	28 (max) mm

• Product Data


Order code	928024701029
Full product code	928024701029
Full product name	Actinic BL TL-D 15W/10 Secura 1SL
Order product name	Actinic BL TL-D 15W/10 Secura 1SL/25
Pieces per pack	1
Packing configuration	25
Packs per outerbox	25
Bar code on pack - EAN1	8711500898586
Bar code on outerbox - EAN3	8711500898593
Logistic code(s) - 12NC	928024701029
Net weight per piece	61.000 gr

Dimensional drawing




TL-D G13

Product	A (Max)	B (Min)	B (Max)	C (Max)	D (Max)
TL-D 15W/10 SECU	437.4	442.1	444.5	451.6	28



Photometric data

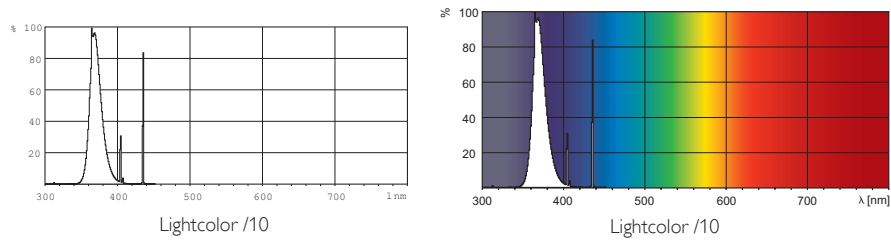

© 2011 Koninklijke Philips Electronics N.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips Electronics N.V. or their respective owners.

www.philips.com/lighting

2011, June 7
data subject to change