PHILIPS

Lighting



Actinic BL TL(-K) / TL-D(-K)

Actinic BL TL-DK 36W/10 1SL/25

With an optimized spectrum matching the eye sensitivity of the housefly, Actinic BL TL(-K)/TL-D(-K)/TL-E/PL-S and PL-L lamps are perfect for attracting insects. They have virtually no UV-B output, and so are perfectly safe. What's more, with the lowest mercury content in the industry and being 100% lead-free, these lamps represent a very good environmental choice. Furthermore, the availability of a wide range of form factors (straight (T5, T8, T12), circular (TL-E) and compact (PL-S/PL-L)) and wattages enables you to make all kinds of designs for your electronic fly killers

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information	
Cap-Base	G13 [Medium Bi-Pin Fluorescent]
Main Application	Insect traps
Life to 50% Failures (Nom)	9000 h
Useful Life (Nom)	5000 h

Light Technical	
Color Code	10
Color Designation	Actinic
Chromaticity Coordinate X (Nom)	225
Chromaticity Coordinate Y (Nom)	230

Operating and Electrical	
Power (Nom)	36 W
Lamp Current (Nom)	0.865 A
Voltage (Nom)	50 V

Mechanical and Housing	
Bulb Shape	T26 [T 26mm]

Approval and Application	
Mercury (Hg) Content (Nom)	8.0 mg

UV	
UV-B/UV-A (IEC)	0.2 %

Actinic BL TL(-K) / TL-D(-K)


UV-A Radiation 100Hr (IEC)	8.8 W

Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	25
Material Nr. (12NC)	928019701003
Net Weight (Piece)	68.900 g

Product Data

Full product code	872790086083200
Order product name	Actinic BL TL-DK 36W/10 1SL/25
EAN/UPC - Product	8727900860832
Order code	928019701003


Dimensional drawing




Product	D (max)	A (max)	B (max)	B (min)	C (max)
Actinic BL TL-DK 36W/10 1SL/25	28 mm	589.8 mm	596.9 mm	594.5 mm	604 mm

TL-DK 36W/10

Photometric data

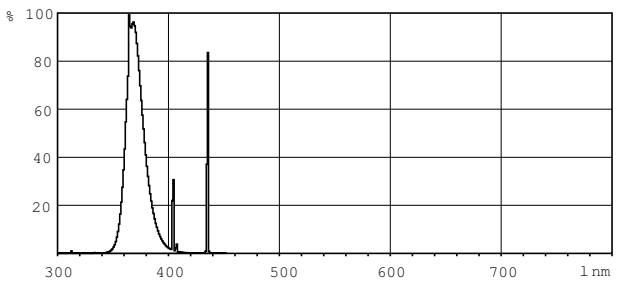

XDPB_XUATLDK_10-Spectral power distribution B/W

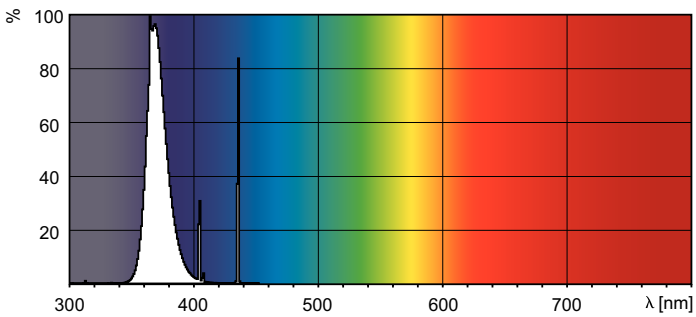

XDPO_XUATLDK_10-Spectral power distribution Colour

© 2021 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.