



Actinic BL TL(-K)/TL-D(-K)

Actinic BL TL 8W/10 1FM

Tubular low-pressure mercury vapour fluorescent lamps

Product data

• General Characteristics

Cap-Base	G5 [G5]
Bulb	T16
Main Application	Reprography
Useful Life	5000 hr
Life to 50% failures	10000 hr
EM	

• Light Technical Characteristics

Colour Code	10
Colour Designation	Actinic
Chromaticity Coordinate X	219 -
Chromaticity Coordinate Y	212 -
Depreciation 500 hours	17 %
Depreciation 1000 hours	25 %
Depreciation 2000 hours	35 %

• Electrical Characteristics

Rated Lamp Wattage	8 W
Technical Lamp Power	7.1 W
Lamp Voltage	56 V
Lamp Current	0.145 A

• Environmental Characteristics

Mercury (Hg) Content	4.4 mg
----------------------	--------

• UV-related Characteristics

UV-A Radiation 100hr (IEC)	1.60 W
UV-B/UV-A (IEC)	0.2 %

• Product Dimensions

Base Face to Base Face A	288.3 (max) mm
Insertion Length B	293 (min), 295.4 (max) mm
Overall Length C	302.5 (max) mm
Diameter D	16 (max) mm

• Product Data



Order code	260420 27
Full product code	871150026042027
Full product name	Actinic BL TL 8W/10 1FM
Order product name	Actinic BL TL 8W/10 1FM/10X25CC
Pieces per pack	1
Packing configuration	10X25CC
Packs per outerbox	250
Bar code on pack - EAN1	8711500260420
Bar code on intermediate packing - EAN2	8711500260437
Bar code on outerbox - EAN3	8711500260444
Logistic code(s) - 12NC	928001001030
Net weight per piece	25.300 gr

Actinic BL TL(-K)/TL-D(-K)

Dimensional drawing


Actinic BL TL 8W/10 1FM

Product	A (Max)	B (Min)	B (Max)	C (Max)	D (Max)
TL 8W/10	288.3	293	295.4	302.5	16

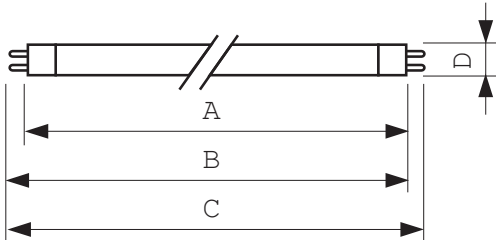

G5

Photometric data

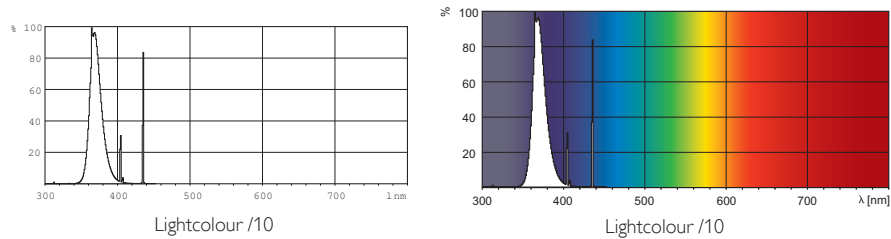

© 2013 Koninklijke Philips Electronics N.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips Electronics N.V. or their respective owners.

www.philips.com/lighting

2013, January 18
data subject to change